

BLAZE DOWNLIGHTS

LED FIRE-RATED DOWNLIGHTS



Dimmable



Fire Rated



IP64 Rated



Soundproof

BLAZE ROUND OVERVIEW



BLAZE ROUND
ADJUSTABLE 7W

3



BLAZE ROUND SMALL
ADJUSTABLE 5W

5




BLAZE ROUND
FIXED 7W

4



BLAZE ROUND SMALL
FIXED 5W

6

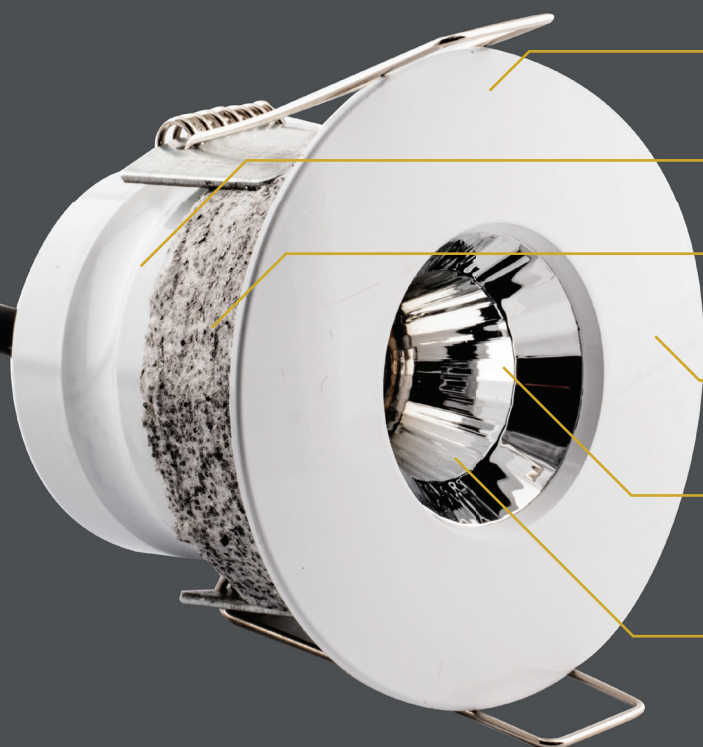

IP64 - Dust tight. Protection from splashed water.


Integrated driver, fully dimmable

Fire Rated - 60 minute

Low profile bezel

Anti-glare reflector

Cree® XLamp® XA1512 LED

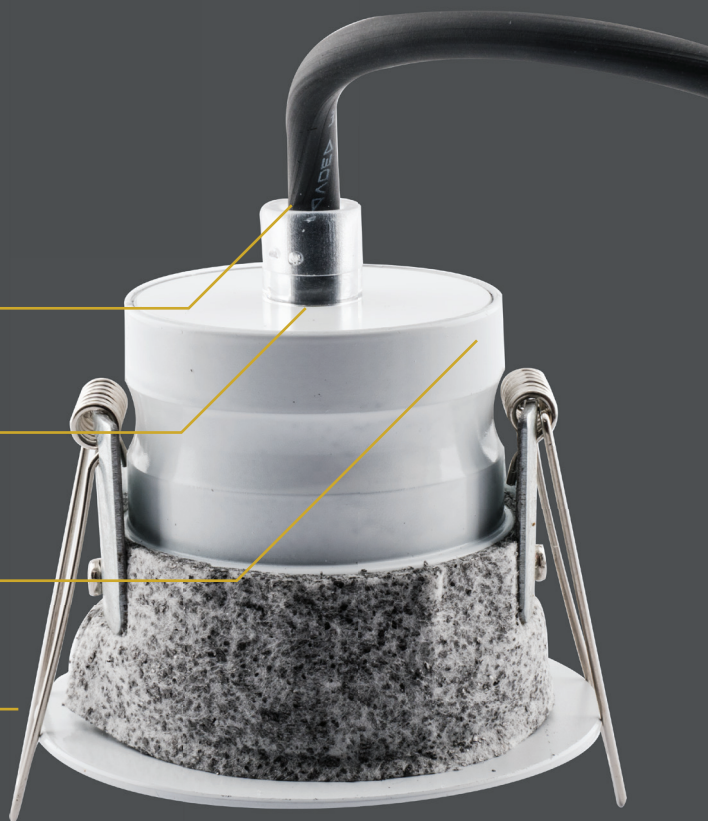

Double insulated


Pre-wired cord gripped

Low ceiling depth

Strong steel clips


BLAZE SQUARE OVERVIEW

 **BLAZE SQUARE ADJUSTABLE 7W** 7

 **BLAZE SQUARE SMALL ADJUSTABLE 5W** 9

 **BLAZE SQUARE FIXED 7W** 8

 **BLAZE SQUARE SMALL FIXED 5W** 10

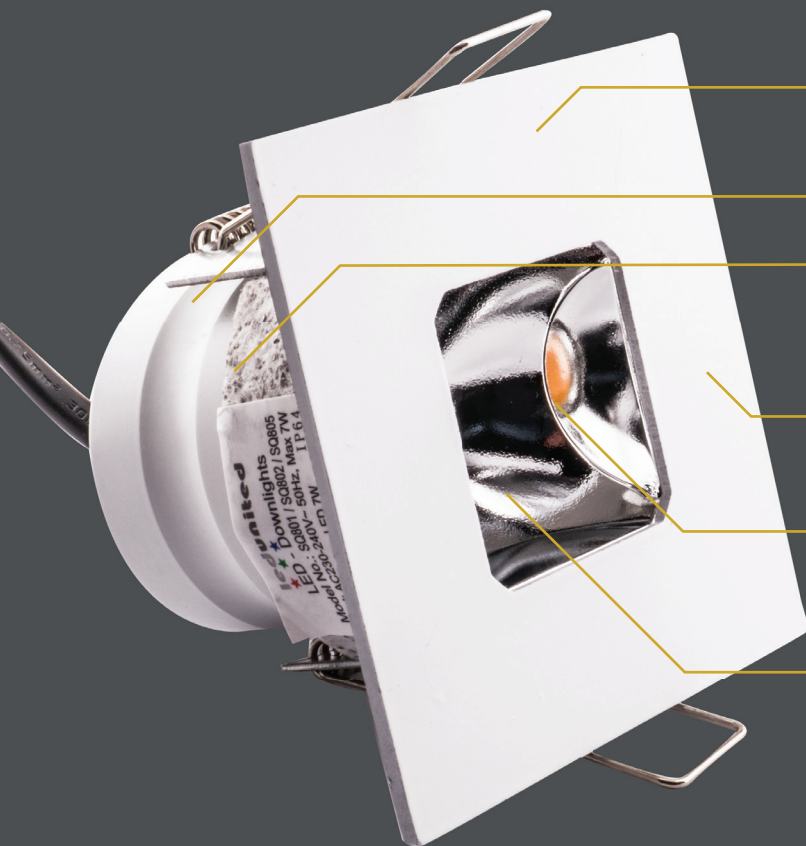

IP64 - Dust tight. Protection from splashed water.

Integrated driver, fully dimmable


Fire Rated - 60 minute

Low profile bezel

Anti-glare reflector

Cree® XLamp® XA1512 LED

- Double insulated
- Pre-wired cord gripped
- Low ceiling depth
- Strong steel clips

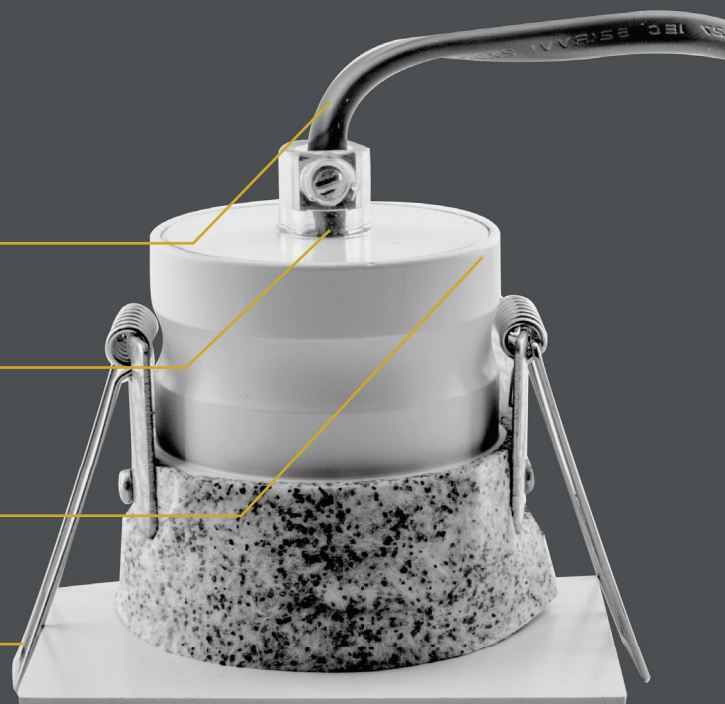

BLAZE ROUND ADJUSTABLE 7W



WHITE





CHROME



NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 64mm
- Overall Diameter 75mm
- 25,000 hours lifetime

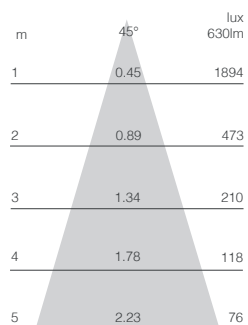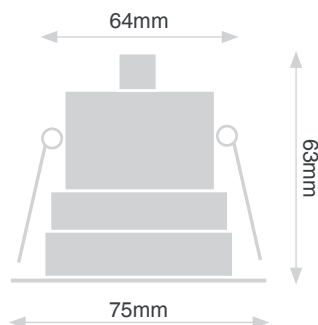


Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZAR801IN	Yes	7W	75W	45°	0.90	630	90	80
White	3000K	FIRE BLAZAR801WW	Yes	7W	75W	45°	0.90	630	90	80
White	4000K	FIRE BLAZAR801CW	Yes	7W	75W	45°	0.90	630	90	80
Chrome	3000K	FIRE BLAZAR802WW	Yes	7W	75W	45°	0.90	630	90	80
Nickel	3000K	FIRE BLAZAR805WW	Yes	7W	75W	45°	0.90	630	90	80

BLAZE ROUND FIXED 7W



WHITE



BRASS





CHROME



NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 64mm
- Overall Diameter 75mm
- 25,000 hours lifetime

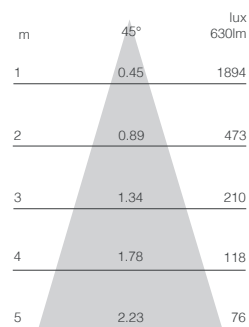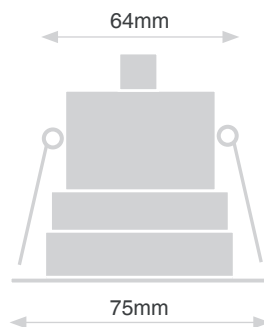

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZE 801IN	Yes	7W	75W	45°	0.90	630	90	80
White	3000K	FIRE BLAZE 801WW	Yes	7W	75W	45°	0.90	630	90	80
White	4000K	FIRE BLAZE 801CW	Yes	7W	75W	45°	0.90	630	90	80
Chrome	2700K	FIRE BLAZE 802CH	Yes	7W	75W	45°	0.90	630	90	80
Nickel	2700K	FIRE BLAZE 805NK	Yes	7W	75W	45°	0.90	630	90	80
Brass	2700K	FIRE BLAZE 803BR	Yes	7W	75W	45°	0.90	630	90	80

BLAZE ROUND SMALL ADJUSTABLE 5W



WHITE





CHROME



NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 54mm
- Overall Diameter 64mm
- 25,000 hours lifetime

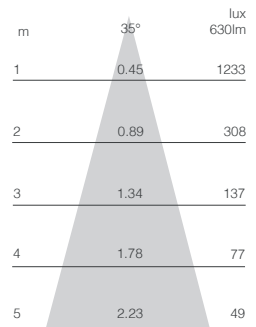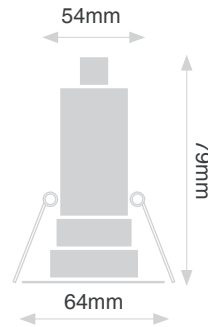

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZAR501IN	Yes	5W	50W	35°	0.90	420	84	80
White	3000K	FIRE BLAZAR501WW	Yes	5W	50W	35°	0.90	420	84	80
White	4000K	FIRE BLAZAR501CW	Yes	5W	50W	35°	0.90	420	84	80
Chrome	3000K	FIRE BLAZAR502WW	Yes	5W	50W	35°	0.90	420	84	80
Nickel	3000K	FIRE BLAZAR505WW	Yes	5W	50W	35°	0.90	420	84	80

BLAZE ROUND SMALL FIXED 5W



WHITE





CHROME



NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 38mm
- Overall Diameter 48mm
- 25,000 hours lifetime

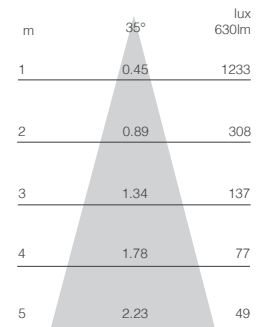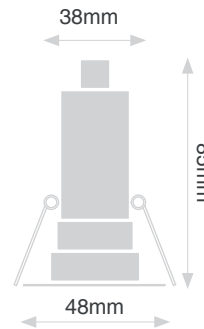

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZE 501WH	Yes	5W	50W	35°	0.90	420	84	80
White	3000K	FIRE BLAZE 501WW	Yes	5W	50W	35°	0.90	420	84	80
White	4000K	FIRE BLAZE 501CW	Yes	5W	50W	35°	0.90	420	84	80
Chrome	2700K	FIRE BLAZE 502CH	Yes	5W	50W	35°	0.90	420	84	80
Nickel	2700K	FIRE BLAZE 505NK	Yes	5W	50W	35°	0.90	420	84	80

BLAZE SQUARE ADJUSTABLE 7W



WHITE





CHROME




NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 80mm
- Overall Diameter 90mm
- 25,000 hours lifetime

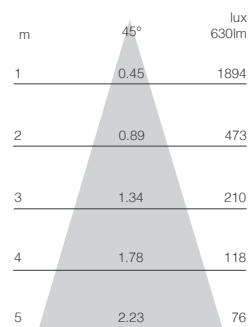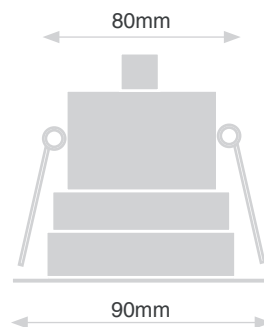

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZAS801IN	Yes	7W	75W	45°	0.90	630	90	80
White	3000K	FIRE BLAZAS801WW	Yes	7W	75W	45°	0.90	630	90	80
White	4000K	FIRE BLAZAS801CW	Yes	7W	75W	45°	0.90	630	90	80
Chrome	3000K	FIRE BLAZAS802WW	Yes	7W	75W	45°	0.90	630	90	80
Nickel	3000K	FIRE BLAZAS805WW	Yes	7W	75W	45°	0.90	630	90	80

BLAZE SQUARE FIXED 7W

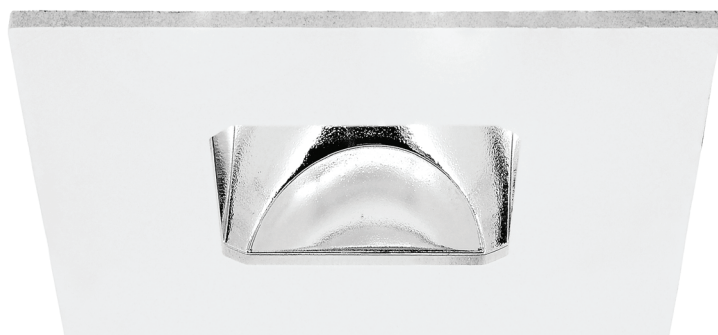

WHITE





CHROME




NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 64mm
- Overall Diameter 81mm
- 25,000 hours lifetime

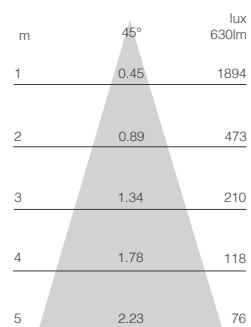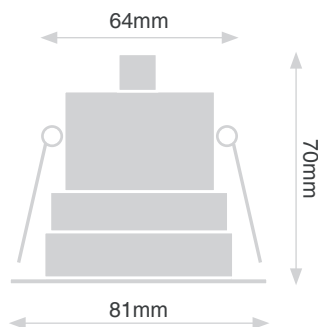

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZSQ801IN	Yes	7W	75W	45°	0.90	630	90	80
White	3000K	FIRE BLAZSQ801WW	Yes	7W	75W	45°	0.90	630	90	80
White	4000K	FIRE BLAZSQ801CW	Yes	7W	75W	45°	0.90	630	90	80
Chrome	2700K	FIRE BLAZSQ802CH	Yes	7W	75W	45°	0.90	630	90	80
Nickel	2700K	FIRE BLAZSQ805NK	Yes	7W	75W	45°	0.90	630	90	80

BLAZE SQUARE SMALL ADJUSTABLE 5W

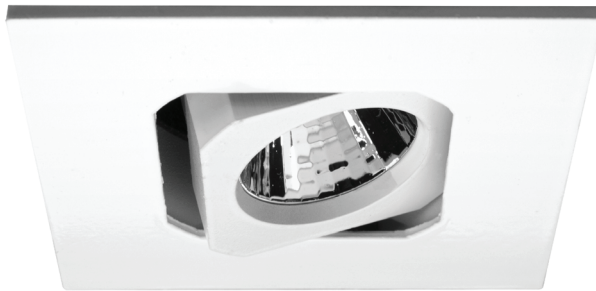

WHITE





CHROME




NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 62mm
- Overall Diameter 70mm
- 25,000 hours lifetime

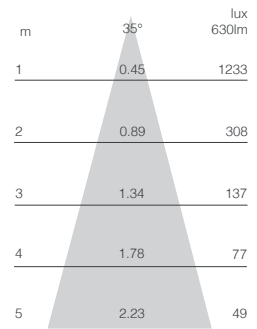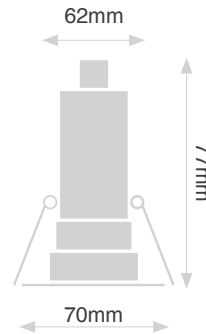

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZAS501IN	Yes	5W	50W	35°	0.90	420	84	80
White	3000K	FIRE BLAZAS501WW	Yes	5W	50W	35°	0.90	420	84	80
Whitel	4000K	FIRE BLAZAS501CW	Yes	5W	50W	35°	0.90	420	84	80
Chrome	3000K	FIRE BLAZAS502WW	Yes	5W	50W	35°	0.90	420	84	80
Nickel	3000K	FIRE BLAZAS505WW	Yes	5W	50W	35°	0.90	420	84	80

BLAZE SQUARE SMALL FIXED 5W

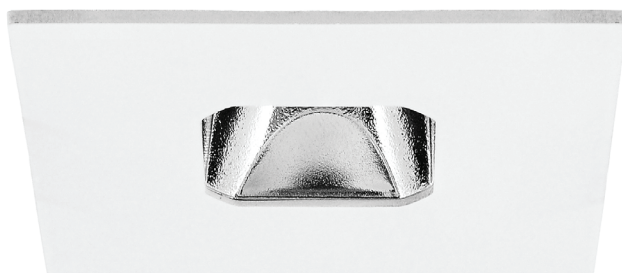

WHITE





CHROME



NICKEL

- Fire Rated - Part B
- Energy Efficient - Part L
- Soundproof - Part E
- Rated IP64
- Small and Compact Size
- Dimmable with leading/trailing edge dimmers
- Double Insulated
- Cut-out 39mm
- Overall Diameter 50mm
- 25,000 hours lifetime

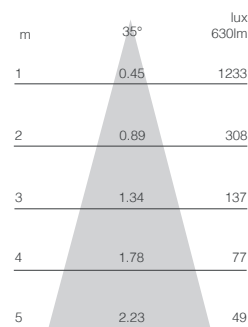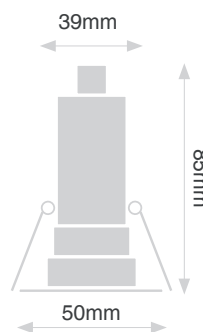

Colour	Colour Temp	Product Code	Dimming	Wattage	Comparable Halogen	Beam Angle	Power Factor	Lumens	Lumens per Watt	CRI
White	2700K	FIRE BLAZSQ501IN	Yes	7W	50W	35°	0.90	420	84	80
White	3000K	FIRE BLAZSQ501WW	Yes	7W	50W	35°	0.90	420	84	80
White	4000K	FIRE BLAZSQ501CW	Yes	7W	50W	35°	0.90	420	84	80
Chrome	2700K	FIRE BLAZSQ502CH	Yes	7W	50W	35°	0.90	420	84	80
Nickel	2700K	FIRE BLAZSQ505NK	Yes	7W	50W	35°	0.90	420	84	80

Wandsworth Showroom
21 Lydden Road
Wandsworth
London SW18 4LT, UK

Fulham Showroom
82-84 New Kings Road
Fulham
London SW6 4LU, UK

available at :



Tel: +44 (0)20 8874 2234
Fax: +44 (0)20 8871 2262

www.mrresistor.com